


- 1. REFER TO DPW DIRECTOR'S ORDER NO. 178,493 APPROVING THE USE OF PERMEABLE PAVING SYSTEMS FOR ALLOWABLE USE.
- 2. SCARIFY SUBGRADE TO MIN. 2" DEPTH IMMEDIATELY PRIOR TO PLACEMENT OF BASE COURSE, SEE SPECS.
- 3. AVOID COMPACTION OF EXISTING SUBGRADE
- 4. PLACE BASE COURSE(S) IN LIFTS AND COMPACT WITH VIBRATORY COMPACTOR, SEE SPECS.
- 4. SET PAVERS 1/8"-1/4" MAX. HIGHER THAN ADJACENT RIGID EDGE TO ALLOW FOR DIFFERENTIAL SETTLING.
- 5. PAVER EDGE RESTRAINT SHALL BE RIGID, 4"-WIDE MIN. CONCRETE HEADER X FULL DEPTH OF BASE COURSE(S). WOOD HEADERS OR METAL EDGE RESTRAINTS ARE NOT ACCEPTABLE.

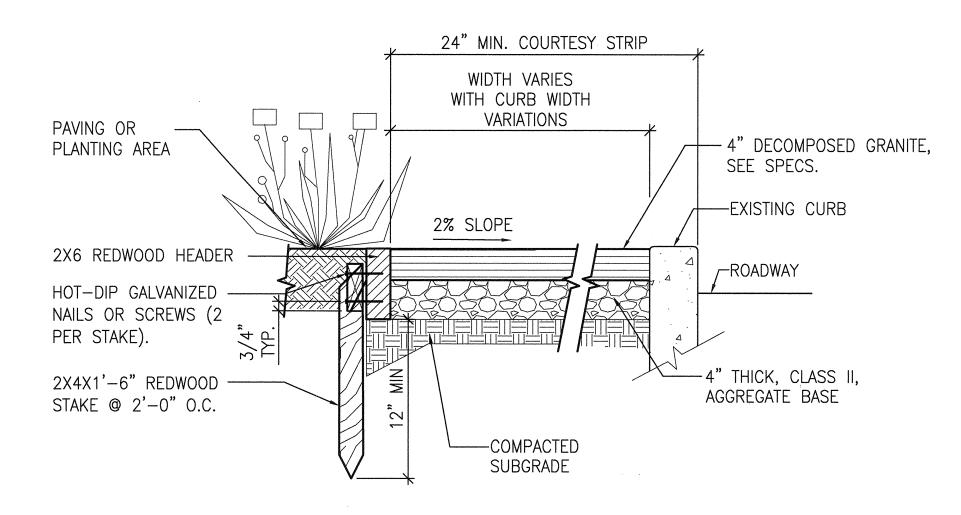

DECOMPOSED GRANITE PAVING OPTION IN COURTESY STRIP SCALE: 1"=1'-0"

ORDER FOR CLEARANCES) AND PENDING PROXIMITY TO STREET CORNER (PER DPW DIRECTOR'S ORDER ON TREE PLANTING (ORDER NO 169,946)).

1. PROPER TREE LOCATION IS PENDING UNDERGROUND AND ABOVE GROUND UTILITIES (PER DPW DIRECTOR'S

NOTES:

DESCRIPTION

TABLE OF REVISIONS THIS DRAWING WAS LAST MODIFIED: 11/30/10 12:06, BY: ko'day

NO. DATE

<u>PLAN</u>

2. WHERE SIDEWALK SLOPES GREATER THAN 10% A RAISED EDGE SHALL BE INSTALLED, SEE SHEET L-3.1 UNIT PAVERS ON AGGEGRATE BASE AND UNIT PAVERS ON CONCRETE BASE

(NOTE: CONDITION SHOWN IS AT TYPICAL SIDEWALK COURTESY STRIP. PAVER INSTALLATION PROFILES SHOWN, BASE COURSE(S) AND RIGID HEADERS, ARE TYPICAL CONDITIONS FOR STANDARD CONSTRUCTION APPLICATIONS)

CITY AND COUNTY OF SAN FRANCISCO

1 | 10.28.10 | ADA REVIEW MODIFICATIONS REFERENCE INFORMATION & FILE NO. OF SURVEYS **BUREAU OF ENGINEERING** 2 | 11.30.10 | NOTES-DPW DIRECTOR'S ORDER ON TREE PLANTING **DEPARTMENT OF PUBLIC WORKS**



	DESIGNED:	DATE:	APPROVED	
	ко	10/8/10		
	DRAWN:	DATE:	SECTION MANAGER DATE:	
	KO/EB	10/8/10	DEPUTY BUREAU MANAGER DATE:	SH
	CHECKED:	DATE:		
	SH	10/8/10	CITY ENGINEER DATE:	

SCALE:	CITY OF SAN FRANCISCO	CONTRACT NO.
AS SHOWN	SIDEWALK LANDSCAPING REFERENCE DRAWINGS	DRAWING NO. L-3.0
SHEET OF SHEETS		FILE NO.
5 OF 7	PAVING PLAN & DETAILS	REV. NO.

SCALE: N.T.S.